




FRONT VIEW

	NOZZLE SCHEDULE							
ITE/	M SIZI	RATING	TYPE	MATL.	PROJ. IN	PROJ. OUT	REMARKS	
Α	6''	N.P.T.	H.CPL.	C.S.	STD.	STD.	PRIMARY EMERGENCY VENT OPENING	
В	6''	N.P.T.	H.CPL.	C.S.	STD.	STD.	SECONDARY EMERGENCY VENT OPENING	
С	2"	N.P.T.	W.F.	C.S.	STD.	STD.		

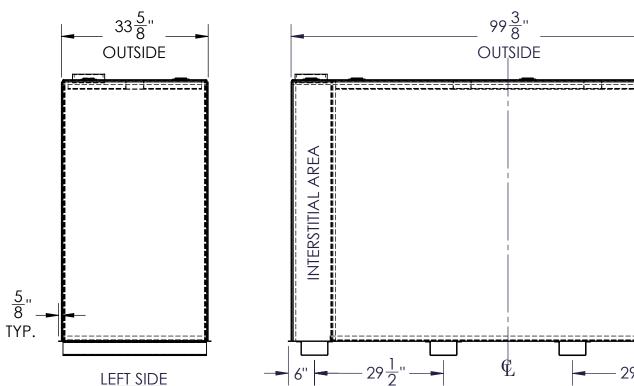

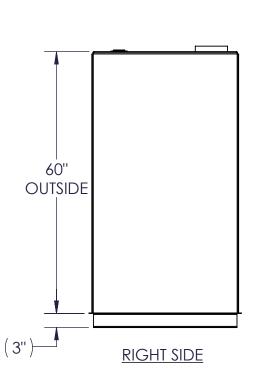

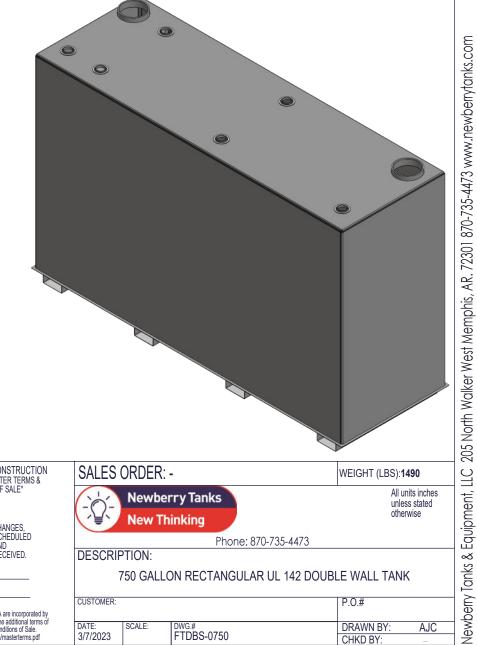

NOTES:

- MATERIAL: H.R. CARBON STEEL Α.
- DESIGN & OPERATING PRESSURE: ATMOSPHERIC. DESIGN & OPERATING TEMPERATURE: AMBIENT.
- TANK TO BE BUILT & LABELED PER U.L. SPEC. #142. D.
- E. TANK TO BEAR MANUFACTURERS & U.L. LABELS ONLY.
- TANK TO BE AIR TESTED WITH WATER & SOAP SUDS SOLUTION.
- INTERIOR: REMOVE WELD SLAG (SHIP CLEAN & DRY).
- EXTERIOR: GRAY PRIMER INCLUDED; SEE SALES ORDER FOR TOP COAT.
- ALL FITTINGS TO BE PROTECTED FOR SHIPMENT.
- CUSTOMER HAS THE RESPONSIBILITY TO VERIFY ALL DIMENSIONS.

APPROVAL FOR CONSTRUCTION SCHEDULE A - MASTER TERMS & CONDITION OF SALE*

APPROVED AS DRAWN.

APPROVED WITH NOTED CHANGES, CONSTRUCTION WILL BE SCHEDULED WHEN SIGNED DRAWING AND CONFIRMED ORDER ARE RECEIVED.

*All pages of this Schedule A are incorporated by reference and are a part of the additional terms of the Master Terms & Conditions of Sale. www.newberrytanks.com/masterterms.pdf SALES ORDER: -Newberry Tanks **New Thinking** Phone: 870-735-4473

DESCRIPTION:

All units inches

unless stated

750 GALLON RECTANGULAR UL 142 DOUBLE WALL TANK

CUSTOMER

P.O.# DWG.# FTDBS-0750 DRAWN BY 3/7/2023 CHKD BY: