




	NOZZLE SCHEDULE							
Ī	ITEM	SIZE	RATING	TYPE	MATL	PROJ IN	PROJ OUT	REMARKS
Ī	Α	3/4"	N.P.T.	W.F.	C.S.	STD.	STD.	DRAIN
	В	2"	N.P.T.	W.F.	C.S.	STD.	STD.	
	С	4"	N.P.T.	W.F.	C.S.	STD.	STD.	EMERGENCY VENT OPENING

TOP VIEW



LEFT SIDE

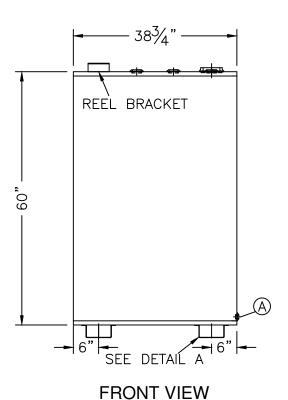

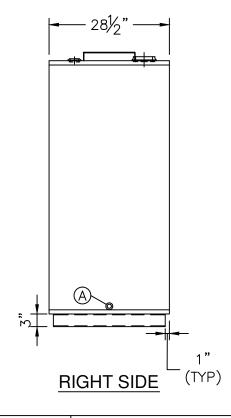

NOTES:

- A. Quantity:
- B. Material: H.R. Carbon Steel
- C. Tank: 12 GA w/ 10 GA Top
- D. Design & Operating Pressure: Atmospheric.
- E. Design & Operating Temperature: Ambient.
- F. Tank to be Built & Labeled per U.L. Spec. #142.
- G. Tank to Bear Manufacturers & U.L. Labels Only.
- H. Tank to be Air Tested with Water & Soap Suds Solution.
- I. Interior: Remove Weld Slag (Ship Clean & Dry).
- J. Exterior: Gray primer included; see Sales Order for top coat.
- K. All Fittings to be Protected for Shipment.
- L. Customer has the Responsibility to Verify All Dimensions.

*All pages of this Schedule A are incorporated by reference and are a part of the additional terms of the Master Terms & Conditions of Sale.

www.newberrytanks.com/masterterms.pdf

APPROVAL FOR CONSTRUCTION SCHEDULE A - MASTER TERMS & CONDITIONS OF SALE*

☐ APPROVED AS DRAWN.

DATE:

☐ APPROVED WITH NOTED CHANGES, CONSTRUCTION WILL BE SCHEDULED WHEN SIGNED DRAWING AND CONFIRMED ORDER ARE RECEIVED. SIGNATURE

SALES ORDER #

Phone: 870-735-4473 Fax: 870-735-3982

VESSEL DESCRIPTION:

275 GALLON RECTANGULAR UL 142 SINGLE WALL VERTICAL TANK

CUSTOMER:

DATE: SCALE: DRAWN BY: DWG.# CHKD. BY: FTSBSV-0275