





	NOZZLE SCHEDULE								
ITEM	SIZE	RATING	TYPE	MATL	PROJ IN	PROJ OUT	REMARKS		
Α	4''	N.P.T.	W.F.	C.S.	STD.	STD.	EMERGENCY VENT OPENING		
В	2''	N.P.T.	W.F.	C.S.	STD.	STD.			
С	3/4"	N.P.T.	W.F.	C.S.	STD.	STD.	DRAIN		

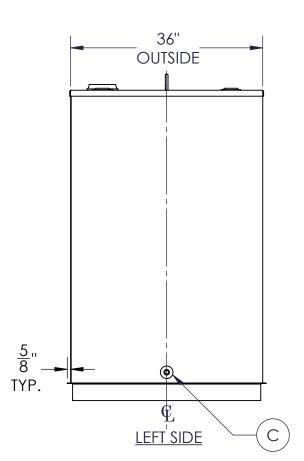

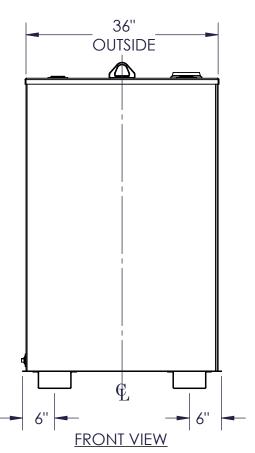

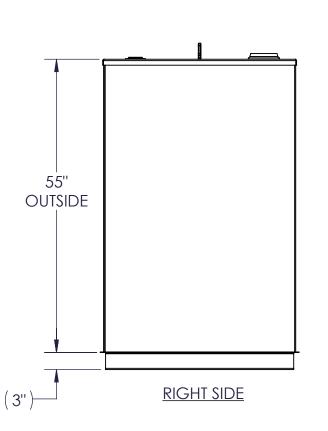

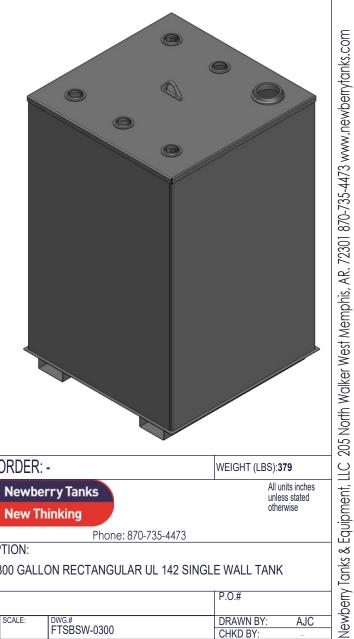

NOTES:

- MATERIAL: H.R. CARBON STEEL
- DESIGN & OPERATING PRESSURE: ATMOSPHERIC. В.
- DESIGN & OPERATING TEMPERATURE: AMBIENT.
- TANK TO BE BUILT & LABELED PER U.L. SPEC. #142. D.
- TANK TO BEAR MANUFACTURERS & U.L. LABELS ONLY.
- TANK TO BE AIR TESTED WITH WATER & SOAP SUDS SOLUTION.
- INTERIOR: REMOVE WELD SLAG (SHIP CLEAN & DRY). G.
- EXTERIOR: GRAY PRIMER INCLUDED; SEE SALES ORDER FOR TOP COAT.
- ALL FITTINGS TO BE PROTECTED FOR SHIPMENT.
- CUSTOMER HAS THE RESPONSIBILITY TO VERIFY ALL DIMENSIONS.

	APPROVAL FOR CONSTRUCTION SCHEDULE A - MASTER TERMS & CONDITION OF SALE*			
]	APPROVED AS DRAWN.			

APPROVED WITH NOTED CHANGES, CONSTRUCTION WILL BE SCHEDULED WHEN SIGNED DRAWING AND CONFIRMED ORDER ARE RECEIVED.

*All pages of this Schedule A are incorporated by reference and are a part of the additional terms of the Master Terms & Conditions of Sale. www.newberrytanks.com/masterterms.pdf

SALES ORDER: -Newberry Tanks **New Thinking** Phone: 870-735-4473 DESCRIPTION:

All units inches

unless stated

P.O.#

300 GALLON RECTANGULAR UL 142 SINGLE WALL TANK

CUSTOMER

DATE: 2/8/2023 DWG.# FTSBSW-0300 DRAWN BY CHKD BY: