



NOZZLE SCHEDULE								
ITEM	SIZE	RATING	TYPE	MATL.	PROJ. IN	PROJ. OUT	REMARKS	NOTES
A	4"	NPT	W.F.	C.S.	STD.	STD.	-	-
B	2"	NPT	M.F.	C.S.	STD.	STD.	-	MONITORING PORT

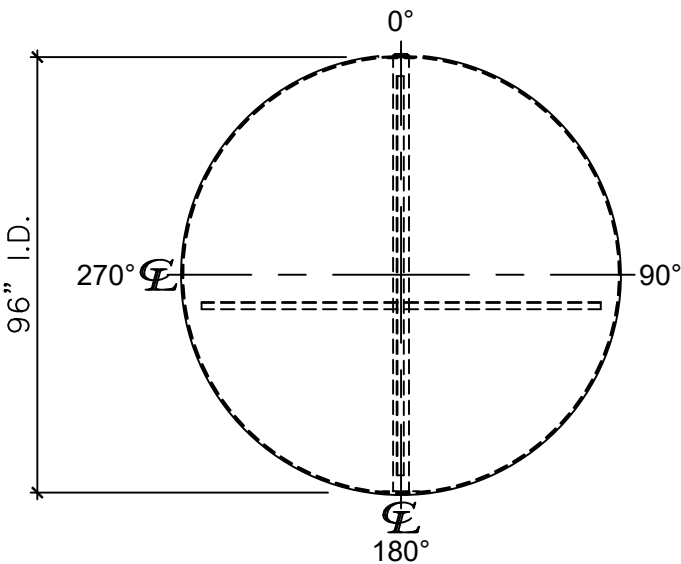

LEFT SIDE

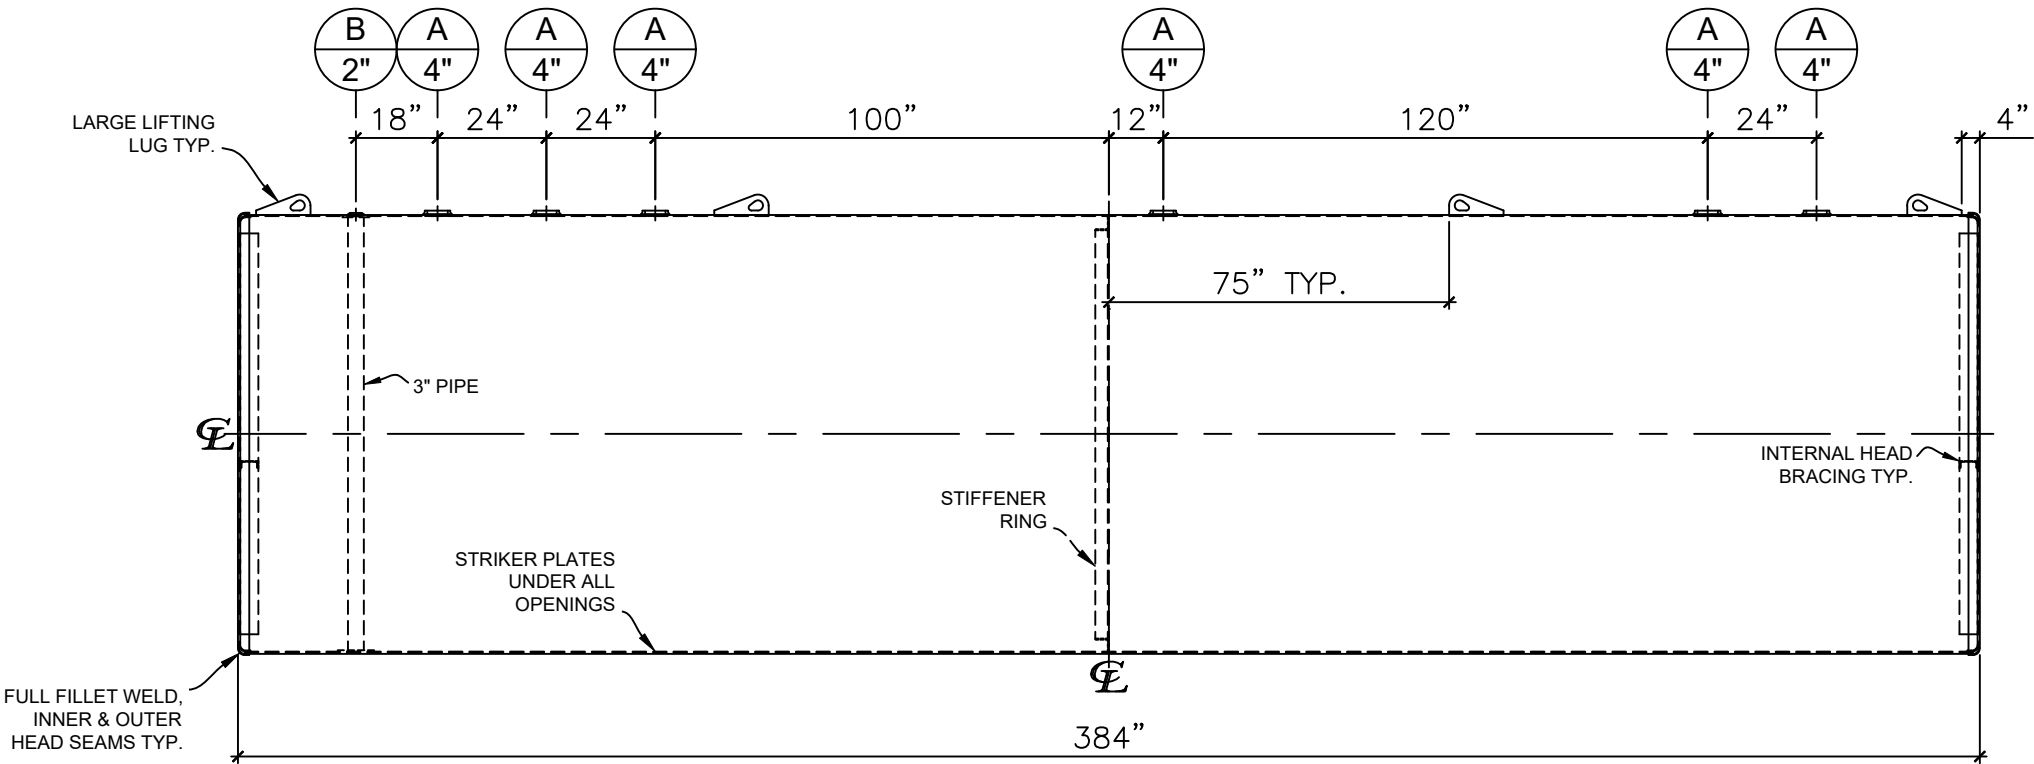

FRONT VIEW

- NOTES:
- A. Material: H.R. Carbon Steel.
 - B. Design Pressure: Atmospheric.
 - C. Design Temperature: Ambient.
 - D. Built & Labeled per UL 58 & 1746 Part 3.
 - E. Exterior: MIN. 100 mils FBG jacketed dual-wall Permatank®
 - F. Seal welded striker plates under ALL openings.
 - G. All Fittings to be protected for shipment.
 - H. Customer to verify Nozzle sizes, locations, and quantities.

APPROVAL FOR CONSTRUCTION SCHEDULE A - MASTER TERMS & CONDITION OF SALE*		SALES ORDER:		WEIGHT (LBS): 10,850	
☐ APPROVED AS DRAWN.					
☐ APPROVED WITH NOTED CHANGES. CONSTRUCTION WILL BE SCHEDULED WHEN SIGNED DRAWING AND CONFIRMED ORDER ARE RECEIVED.		PHONE: 870-735-4473 FAX: 870-735-3982			
SIGNATURE: _____		DESCRIPTION: 12,000 GALLON 96" I.D. x 32'-0" O.A.L. DOUBLE WALL PERMATANK			
DATE: _____		CUSTOMER: _____		P.O.# _____	
*All pages of this Schedule A are incorporated by reference and are a part of the additional terms of the Master Terms & Conditions of Sale. www.newberrytanks.com/masterterms.pdf		DATE: 08/26/26	REV: 001	DWG.# NB12000PRM096	DRAWN BY: WR SHEET 1 OF 1